



WINTER – 14 EXAMINATION

Subject Code: 17102

Model Answer

Page No: 1/16

Que. No.	Sub. Que.	Stepwise Solution	Marks	Total Marks
		<p>Important Instructions to the Examiners:</p> <ol style="list-style-type: none">1) The Answers should be examined by key words and not as word-to-word as given in the model answer scheme.2) The model answer and the answer written by candidate may vary but the examiner may try to assess the understanding level of the candidate.3) The language errors such as grammatical, spelling errors should not be given more importance. (Not applicable for subject English and Communication Skills.)4) While assessing figures, examiner may give credit for principal components indicated in the figure. The figures drawn by the candidate and those in the model answer may vary. The examiner may give credit for any equivalent figure drawn.5) Credits may be given step wise for numerical problems. In some cases, the assumed constant values may vary and there may be some difference in the candidate's Answers and the model answer.6) In case of some questions credit may be given by judgment on part of examiner of relevant answer based on candidate's understanding.7) For programming language papers, credit may be given to any other program based on equivalent concept.		



WINTER – 14 EXAMINATION

Subject Code: 17102

Model Answer

Page No: 02/16

Que. No.	Sub. Que.	Stepwise Solution	Marks	Total Marks
1		Attempt any Nine of the following:		18
	a)	State the effect of any two factors on Elasticity of material. Two factor Factors affecting elasticity: i) Effect of stress: As the stress on the body increase , elasticity of the body decreases gradually. ii) Effect of temperature: Generally a rise in temperature shows decrease in elastic properties of the metals. iii) Effect of hammering and rolling : Hammering and rolling increases elastic properties of crystals. iv) Effect of annealing: Annealing process results in decrease in elastic properties. v) Effect of impurities : Addition of impurity increases elastic properties	2	2
	b)	Calculate stress if a load of 10 N is attached to the lower end of the wire of radius 1mm. Formula Answer with unit Given: Required: F = 10 N Stress = ? r = 0.5 x 10 ⁻³ m $\text{Stress} = F / \text{area} = F / \pi r^2$ $\text{Stress} = 10 / 3.14 \times (0.5 \times 10^{-3})^2$ $\text{Stress} = 1.273 \times 10^7 \text{ N/m}^2$	1 1	2



WINTER – 14 EXAMINATION

Subject Code: 17102

Model Answer

Page No: 04/16

Que. No.	Sub. Que.	Stepwise Solution	Marks	Total Marks
1)	f)	Define i) kcal ii) Absolute zero Each definition Kcal: One kilocalorie of heat is defined as the amount of heat energy required to increase the temperature of one kilogram of water through 1° C. Absolute zero : It is defined as the temperature at which the pressure and volume of the gas theoretically becomes zero.	1	2
	g)	Explain why C_p is greater than C_v ? Proper explanation C_v is the specific heat of gas at constant volume. It is utilized only to increase the temperature of the gas only. But C_p is the specific heat of a gas at constant pressure. It is utilized by two way i.e. To increase the temperature of the gas and to maintain constant pressure (i.e. increase in volume) Therefore C_p is greater than C_v .	2	2



WINTER - 14 EXAMINATION

Subject Code: 17102

Model Answer

Page No: 06/16

Que. No.	Sub. Que.	Stepwise Solution	Marks	Total Marks
1)	j)	Define Transverse Wave and Longitudinal Wave. Each definition Transverse Wave: - The wave in which the direction of vibration of particles of material medium is perpendicular to the direction of propagation of wave is called transverse wave. Longitudinal Wave: - The wave in which the direction of vibration of particles of material medium is parallel to the direction of propagation of wave is called longitudinal wave.	1	2
	k)	State two characteristics of stationary waves. Any two characteristics Characteristics : i) It is superposition of two progressive waves moving in opposite direction in a medium. ii) There is no transfer of energy in a medium. iii) Nodes and antinodes are formed successively. iv) Nodes are the points on the wave whose displacement is zero. v) Antinodes are the points on the wave whose displacement is maximum. vi) The distance between two successive nodes or antinodes is $\lambda/2$. vii) The distance between two successive nodes and antinodes is $\lambda/4$.	2	2



WINTER – 14 EXAMINATION

Subject Code: 17102

Model Answer

Page No: 07/16

Que. No.	Sub. Que.	Stepwise Solution	Marks	Total Marks
1	1)	Define Resonance. Definition When the frequency of the external periodic force applied to a body is exactly equal to (matches) natural frequency of body, the body vibrates with maximum amplitude, the effect is known as resonance Attempt any Four of the following:	2	2
2	a)	Find the weight attached to the lower end of a wire having length 150 cm, radius 0.3 mm and extension produced is 0.6 mm if Young's modulus of wire is $2 \times 10^{11} \text{ N/m}^2$. Formula Substitution and Calculation Answer with unit Given: $L = 150 \text{ cm} = 150 \times 10^{-2} \text{ m}$ $r = 0.3 \text{ mm} = 0.3 \times 10^{-3} \text{ m}$ $l = 0.6 \text{ mm} = 0.6 \times 10^{-3} \text{ m}$ $Y = 2 \times 10^{11} \text{ N}$ Required : $W = F = Mg = ?$	1 1 2	16 4



WINTER – 14 EXAMINATION

Subject Code: 17102

Model Answer

Page No: 08/16

Que. No.	Sub. Que.	Stepwise Solution	Marks	Total Marks
2)	a)	<p>Formula</p> $Y = F.L / A.l$ $F = \pi r^2 l Y / L$ $F = 3.14 \times (0.3 \times 10^{-3})^2 \times 0.6 \times 10^{-3} \times 2 \times 10^{11} / 150 \times 10^{-2}$ $F = 22.60 \text{ N}$ $W = 22.60 \text{ N}$		
	b)	<p>Define</p> <p>i) Elastic limit ii) Yield point iii) Poisson's ratio iv) Factor of safety .</p> <p>Each definition</p> <p>i)Elastic limit: -It is the maximum value of the stress upto which the body shows elasticity.</p> <p>ii) Yield point :- The point at which plastic flow begins is called yield point Y.</p> <p>iii) Poisson's ratio : It is defined as the ratio of lateral strain to longitudinal strain.</p> <p>iv)Factor of Safety : It is defined as the ratio of ultimate stress to working stress.</p> <p>.</p>	1	4



WINTER – 14 EXAMINATION

Subject Code: 17102

Model Answer

Page No: 09/16

Que. No.	Sub. Que.	Stepwise Solution	Marks	Total Marks
2	c)	<p>State Newton’s law of viscosity and hence define coefficient of viscosity. Give it’s SI unit.</p> <p>Statement</p> <p>Definition</p> <p>Unit</p> <p>Newton’s law of viscosity: The viscous force (F) developed between two liquid layers is</p> <ul style="list-style-type: none">i. directly proportional to surface area of liquid layer, (A) i.e. $[F \propto A]$ii. directly proportional to Velocity Gradient, (dv/dx) i.e. $[F \propto (dv/dx)]$ <p>Coefficient of viscosity: “Coefficient of viscosity of a liquid is defined as the viscous force developed between two liquid layers of unit surface area & unit velocity gradient.”</p> <p>SI unit of Coefficient of viscosity is $N\cdot s/m^2$</p>	2 1 1	4
	d)	<p>Distinguish between streamline and turbulent flow (four points).</p> <p>Four points</p>	4	4



WINTER – 14 EXAMINATION

Subject Code: 17102

Model Answer

Page No: 10/16

Que. No.	Sub. Que.	Stepwise Solution	Marks	Total Marks																		
2)	d)	<table border="1"> <thead> <tr> <th>Stream line flow</th> <th>Turbulent flow</th> </tr> </thead> <tbody> <tr> <td>The path of every particle is same</td> <td>The path of every particle is different</td> </tr> <tr> <td>The velocity of particle is constant in magnitude and direction</td> <td>The velocity of particle at each point is not constant</td> </tr> <tr> <td>Flow is regular</td> <td>Flow is irregular</td> </tr> <tr> <td>No circular currents or eddies are developed</td> <td>Random circular currents called vortices are developed</td> </tr> <tr> <td>The liquid flows steadily</td> <td>The flow becomes turbulent after critical velocity.</td> </tr> <tr> <td>e.g The flow of liquid through pipe, water flow of river in summer etc.</td> <td>e.g flow of river in flood, water fall etc.</td> </tr> <tr> <td>$V < V_c$</td> <td>$V > V_c$</td> </tr> <tr> <td>$R < 2000$</td> <td>$R > 3000$</td> </tr> </tbody> </table>	Stream line flow	Turbulent flow	The path of every particle is same	The path of every particle is different	The velocity of particle is constant in magnitude and direction	The velocity of particle at each point is not constant	Flow is regular	Flow is irregular	No circular currents or eddies are developed	Random circular currents called vortices are developed	The liquid flows steadily	The flow becomes turbulent after critical velocity.	e.g The flow of liquid through pipe, water flow of river in summer etc.	e.g flow of river in flood, water fall etc.	$V < V_c$	$V > V_c$	$R < 2000$	$R > 3000$		
Stream line flow	Turbulent flow																					
The path of every particle is same	The path of every particle is different																					
The velocity of particle is constant in magnitude and direction	The velocity of particle at each point is not constant																					
Flow is regular	Flow is irregular																					
No circular currents or eddies are developed	Random circular currents called vortices are developed																					
The liquid flows steadily	The flow becomes turbulent after critical velocity.																					
e.g The flow of liquid through pipe, water flow of river in summer etc.	e.g flow of river in flood, water fall etc.																					
$V < V_c$	$V > V_c$																					
$R < 2000$	$R > 3000$																					
	e)	<p>A capillary tube of diameter 0.2 mm is dipped in a liquid of density $0.9 \times 10^3 \text{ kg / m}^3$ and angle of contact 24°. If the liquid rises by 41 mm in the tube, find the surface tension of liquid.</p> <p>Formula</p> <p>Substitution and Calculation</p> <p>Answer with unit</p> <p>Given :</p> <p>$r = 0.1 \times 10^{-3} \text{ m}$</p> <p>$\rho = 0.9 \times 10^3 \text{ kg / m}^3$</p> <p>$\theta = 24^\circ$</p> <p>$h = 41 \times 10^{-3} \text{ m}$</p> <p>Required:</p> <p>$T = ?$</p>	1 1 2	4																		



WINTER – 14 EXAMINATION

Subject Code: 17102

Model Answer

Page No: 11/16

Que. No.	Sub. Que.	Stepwise Solution	Marks	Total Marks
2)	e)	$T = rh \rho g / 2\cos \theta$ $T = 0.1 \times 10^{-3} \times 41 \times 10^{-3} \times 0.9 \times 10^3 \times 9.8 / 2\cos 24$ $T = 0.019 \text{ N/m}$		
	f)	<p>State the three ways in which heat is transferred from one place to another. Give one example of each.</p> <p>Three ways</p> <p>One examples of each</p> <p>Three ways of heat transfer :</p> <p>Conduction</p> <p>Convection</p> <p>Radiation</p> <p>Examples</p> <p>Conduction</p> <p>Heat sink in electronic circuits, Safety lamp, Ice box etc.</p> <p>Convection</p> <p>Formation of trade winds, Room ventilation system, monsoons etc.</p> <p>Radiation</p> <p>Use of white clothes, Heat radiators in car, In activation of HIV etc.</p>	1 1	4



WINTER - 14 EXAMINATION

Subject Code: 17102

Model Answer

Page No: 12/16

Que. No.	Sub. Que.	Stepwise Solution	Marks	Total Marks
3)		Attempt any four of the following.		16
	a)	State any four applications of conduction. Any four applications i) Bad conductor of heat is used as insulators. E.g. glass , thermo Cole , sawdust etc. ii) The calorimeters are kept in wooden box. iii) The coils of heavy duty transformers are kept in oil to protect it from excessive heat. iv) Thermos flax contain double walled glass vessel with vacuum to maintain the constant temperature. v) Flame of Safety lamps is covered with good conducting material. vi) Thermal insulator is used to prevent heat loss to the environment. Any relevant application can be considered.	4	4
	b)	Volume of certain quantity of gas at NTP is 24 litres. What will be the pressure exerted by the same quantity of gas when enclosed in a gas cylinder of capacity 20 litres at 27⁰ C. Formula Substitution and Calculation Answer with unit	1 1 2	4



WINTER – 14 EXAMINATION

Subject Code: 17102

Model Answer

Page No: 13/16

Que. No.	Sub. Que.	Stepwise Solution	Marks	Total Marks
3)	b)	<p style="text-align: center;">Given:</p> <p>$P_1 = 76 \text{ cm of Hg}$</p> <p>$T_1 = 273 \text{ }^\circ\text{K}$</p> <p>$V_1 = 24 \text{ lit.}$</p> <p>$T_2 = 273 + 27 = 300 \text{ }^\circ\text{K}$</p> <p>$V_2 = 20 \text{ lit}$</p> <p style="text-align: center;">$P_1 V_1 / T_1 = P_2 V_2 / T_2$</p> <p style="text-align: center;">$P_2 = P_1 V_1 T_2 / T_1 V_2$</p> <p style="text-align: center;">$P_2 = 76 \times 24 \times 300 / 273 \times 20$</p> <p style="text-align: center;">$P_2 = 100.21 \text{ cm of Hg}$</p> <p style="text-align: center;">Required:</p> <p style="text-align: center;">$P_2 = ?$</p>		
	c)	<p>Obtain prism formula.</p> <p>Diagram</p> <p>Derivation</p> <div style="display: flex; align-items: flex-start;"> <div style="flex: 1;"> </div> <div style="flex: 1; padding-left: 20px;"> <p>PQ = Incident ray QR = Refracted ray RS = Emergent ray i = Angle of incidence r₁ = Angle of refraction e = Angle of emergence δ = Angle of deviation r₂ = Angle of refraction ∠ BAC = Angle of prism</p> </div> </div> <p>Consider Δ QDR</p> <p style="text-align: center;">$r_1 + r_2 + \angle QDR = 180$</p>	2	4
			2	



WINTER – 14 EXAMINATION

Subject Code: 17102

Model Answer

Page No: 14/16

Que. No.	Sub. Que.	Stepwise Solution	Marks	Total Marks
3)	c)	<p>Consider \square AQDR</p> $\angle A + \angle QDR = 180$ $r_1 + r_2 + \angle QDR = \angle A + \angle QDR$ $\angle A = r_1 + r_2$ <p>For certain value of $\angle i$, angle of deviation δ is called angle of minimum deviation δ_m.</p> <p>At this stage $\angle i = \angle e$ and $r_1 = r_2 = r$</p> <p>Therefore $r_1 + r_2 = 2r = A$, $A = r/2$</p> <p>$\triangle QER$ $\delta = x + y$</p> $\delta = (i - r_1) + (e - r_2)$ $\delta = i + e - (r_1 + r_2)$ <p>At $\delta = \delta_m$ $r_1 = r_2 = r$ $i = e$,</p> $i = \frac{A + \delta_m}{2}$ $r = \frac{A}{2}$ <p>By Snell's law $\mu = \frac{\sin i}{\sin r}$</p> <p>By substituting values if i and r in above law we get,</p> $\mu = \frac{\sin\left(\frac{A + \delta_m}{2}\right)}{\sin\left(\frac{A}{2}\right)}$ <p>Where,</p> <p>μ = refractive index of material of prism. A = Angle of prism. δ_m = Angle of minimum deviation</p>		

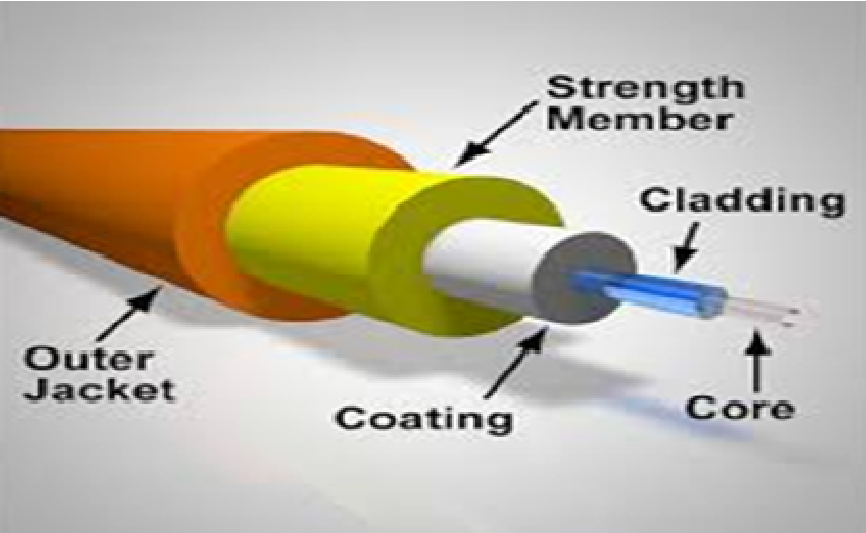


WINTER - 14 EXAMINATION

Subject Code: 17102

Model Answer

Page No: 15/16

Que. No.	Sub. Que.	Stepwise Solution	Marks	Total Marks
3)	d)	<p>1) State the necessary conditions required for propagation of light through optical fibre.</p> <p>Each condition</p> <p>Conditions :</p> <ul style="list-style-type: none">a) Light should travel from denser medium to rarer medium.b) Refractive index of core must be greater than cladding. <p>2) Draw labeled diagram showing structure of optical fibre.</p> <p>Diagram with labels</p> 	1	2
			2	2



WINTER – 14 EXAMINATION

Subject Code: 17102

Model Answer

Page No: 16/16

Que. No.	Sub. Que.	Stepwise Solution	Marks	Total Marks
3)	e)	<p>A particle performing SHM has period of 3 sec. Calculate its acceleration at 2 cm from mean position.</p> <p>Formula Substitution and Calculation Answer with unit</p> <p>Given : Required: T = 3 sec. a = ? x = 2 cm = 2×10^{-2} m</p> $a = \omega^2 x$ $a = (2\pi / T)^2 \cdot x$ $a = (2 \times 3.14 / 3)^2 \cdot 2 \times 10^{-2}$ $a = 0.087 \text{ m/s}^2$	1 1 2	4
	f)	<p>Define i) Amplitude ii) Wavelength iii) Frequency iv) Phase of particle in SHM.</p> <p>Each definition</p> <ul style="list-style-type: none">• Amplitude : It is defined as the maximum displacement of the particle from either side of mean position.• Wavelength : It is defined as the distance between two consecutive particles which are in the same state of vibration (or between two consecutive crest or trough) .OR It is the distance travelled by the wave in one oscillation.• Frequency : It is defined as the number of oscillation completed in one second.• Phase of particle in SHM: It is quantity which represents the state (position, direction and displacement) of the particle at particular instant performing SHM.	1	4